

CDR File Information

| | |
|--|---|
| Vehicle Identification Number | 1G1JC124827105812 |
| Investigator | Phillips/Casteel/Beck |
| Case Number | |
| Investigation Date | Tuesday, November 1 2005 |
| Crash Date | Tuesday, November 1 2005 |
| Filename | 1G1JC124827105812.CDR |
| Saved on | Tuesday, November 1 2005 at 01:49:22 PM |
| Collected with CDR version | Crash Data Retrieval Tool 2.710 |
| Collecting program verification number | 3F8F669A |
| Reported with CDR version | Crash Data Retrieval Tool 2.710 |
| Reporting program verification number | 3F8F669A |
| Interface used to collected data | Block number: 00 Interface version: 42 Date: 03-10-05 Checksum: 1300 |
| Event(s) recovered | Deployment Non-Deployment |

SDM Data Limitations

SDM Recorded Crash Events:

There are two types of SDM recorded crash events. The first is the Non-Deployment Event. A Non-Deployment Event is an event severe enough to "wake up" the sensing algorithm but not severe enough to deploy the air bag(s). It contains Pre-Crash and Crash data. The SDM can store up to one Non-Deployment Event. This event may be overwritten by another Non-Deployment event. This event will be cleared by the SDM after the ignition has been cycled 250 times.

The second type of SDM recorded crash event is the Deployment Event. It also contains Pre-Crash and Crash data. The SDM can store up to two different Deployment Events, if they occur within five seconds of one another. Deployment events cannot be overwritten or cleared from the SDM. Once the SDM has deployed the air bag, the SDM must be replaced.

The data in the non-deployment file will be locked after a deployment, if the non-deployment occurred within 5 seconds before the deployment or a deployment level event occurs within 5 seconds after the deployment.

SDM Data Limitations:

-SDM Recorded Vehicle Forward Velocity Change is one of the measures used to make air bag deployment decisions. SDM Recorded Vehicle Forward Velocity Change reflects the change in forward velocity that the sensing system experienced during the recorded portion of the event. SDM Recorded Vehicle Forward Velocity Change is the change in velocity during the recording time and is not the speed the vehicle was traveling before the event, and is also not the Barrier Equivalent Velocity. This data should be examined in conjunction with other available physical evidence from the vehicle and scene when assessing occupant or vehicle forward velocity change. For deployments and deployment level events, the SDM will record 100 milliseconds of data after deployment criteria is met and up to 50 milliseconds before deployment criteria is met. For non-deployments, the SDM will record the first 150 milliseconds of data after algorithm enable.

-SDM Recorded Vehicle Speed accuracy can be affected if the vehicle has had the tire size or the final drive axle ratio changed from the factory build specifications.

-Brake Switch Circuit Status indicates the status of the brake switch circuit.

-Pre-Crash Electronic Data Validity Check Status indicates "Data Invalid" if the SDM does not receive a valid message.

-Driver's Belt Switch Circuit Status indicates the status of the driver's seat belt switch circuit

-Passenger Front Air Bag Suppression Switch Circuit Status indicates the status of the suppression switch circuit.

-The Time Between Non-Deployment and Deployment Events is displayed in seconds. If the time between the two events is greater than five seconds, "N/A" is displayed in place of the time.

-If power to the SDM is lost during a crash event, all or part of the crash record may not be recorded.

SDM Data Source:

All SDM recorded data is measured, calculated, and stored internally, except for the following:

-Vehicle Speed, Engine Speed, and Percent Throttle data are transmitted once a second by the Powertrain Control Module (PCM), via the Class 2 data link, to the SDM.

-Brake Switch Circuit Status data is transmitted once a second by either the ABS module or the PCM, via the Class 2 data link, to the SDM. Depending on vehicle option content, the Brake Switch Circuit Status data may not be available.


-If the vehicle is a 2000 - 2002 Chevrolet Cavalier Z24 or a Pontiac Sunfire GT, with a manual transmission (RPO MM5) and a 2.4L engine (RPO LD9), the Brake Switch Circuit Status data will be reported in the opposite state than what actually occurred, e.g. an actual brake switch status of "ON" will be reported as "OFF".

-In most vehicles, the Driver's Belt Switch Circuit is wired directly to the SDM. In some vehicles, the Driver's Belt Switch Circuit Status data is transmitted from the Body Control Module (BCM), via the Class 2 data link, to the SDM.


-The Passenger Front Air Bag Suppression Switch Circuit is wired directly to the SDM.

System Status At Deployment

| | |
|--|------------------------|
| SIR Warning Lamp Status | OFF |
| Driver's Belt Switch Circuit Status | BUCKLED |
| Passenger Front Air Bag Suppression Switch Circuit Status | Air Bag Not Suppressed |
| Ignition Cycles At Deployment | 13790 |
| Ignition Cycles At Investigation | 13791 |
| Maximum SDM Algorithm Forward Velocity Change (MPH) | -7.78 |
| Algorithm Enable to Maximum SDM Recorded Velocity Change (msec) | 97.5 |
| Time Between Non-Deployment And Deployment Events (sec) | N/A |
| Time From Algorithm Enable to Deployment Command Criteria Met (msec) | 37.5 |

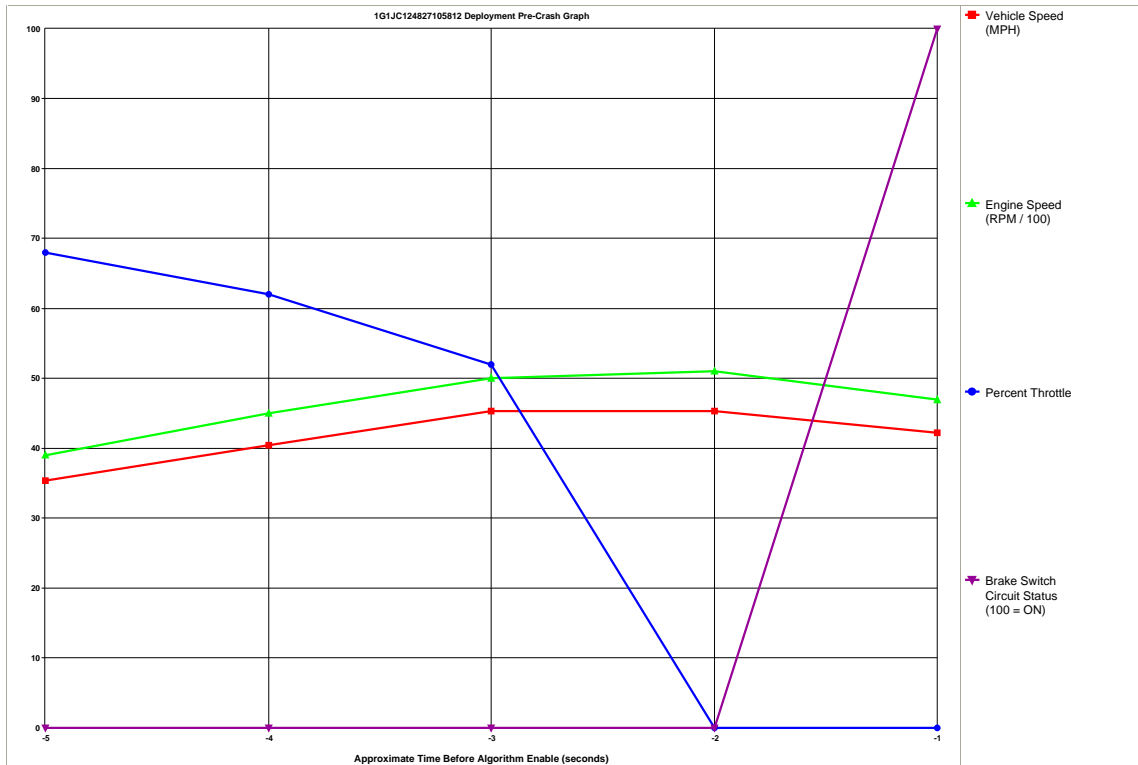


| Seconds Before AE | Vehicle Speed (MPH) | Engine Speed (RPM) | Percent Throttle | Brake Switch Circuit Status |
|-------------------|---------------------|--------------------|------------------|-----------------------------|
| -5 | 35 | 3904 | 68 | OFF |
| -4 | 40 | 4480 | 62 | OFF |
| -3 | 45 | 4992 | 52 | OFF |
| -2 | 45 | 5056 | 0 | OFF |
| -1 | 42 | 4672 | 0 | ON |

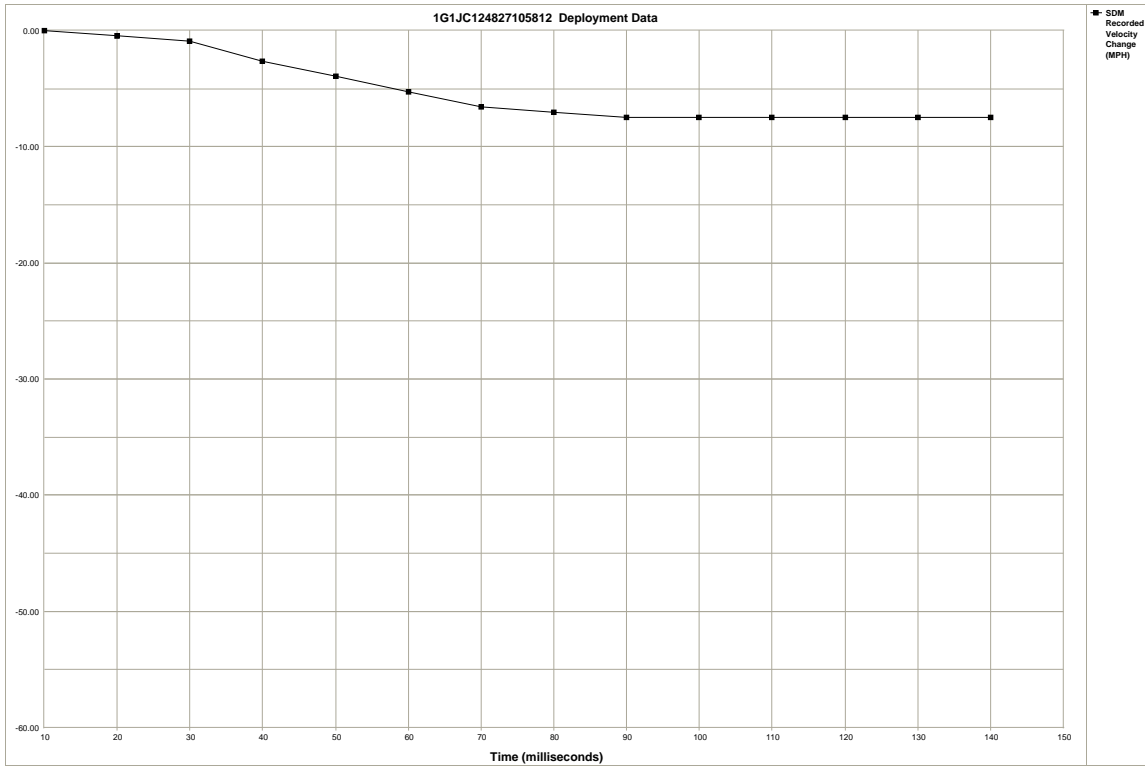


| Time (milliseconds) | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 |
|------------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|
| SDM Recorded Velocity Change | 0.00 | -0.44 | -0.88 | -2.63 | -3.95 | -5.27 | -6.58 | -7.02 | -7.46 | -7.46 | -7.46 | -7.46 | -7.46 | -7.46 | N/A |

System Status At Non-Deployment

| | |
|---|------------------------|
| SIR Warning Lamp Status | OFF |
| Driver's Belt Switch Circuit Status | BUCKLED |
| Passenger Front Air Bag Suppression Switch Circuit Status | Air Bag Not Suppressed |
| Ignition Cycles At Non-Deployment | 13788 |
| Ignition Cycles At Investigation | 13791 |
| Maximum SDM Algorithm Forward Velocity Change (MPH) | -6.36 |
| Algorithm Enable to Maximum SDM Recorded Velocity Change (msec) | 180 |

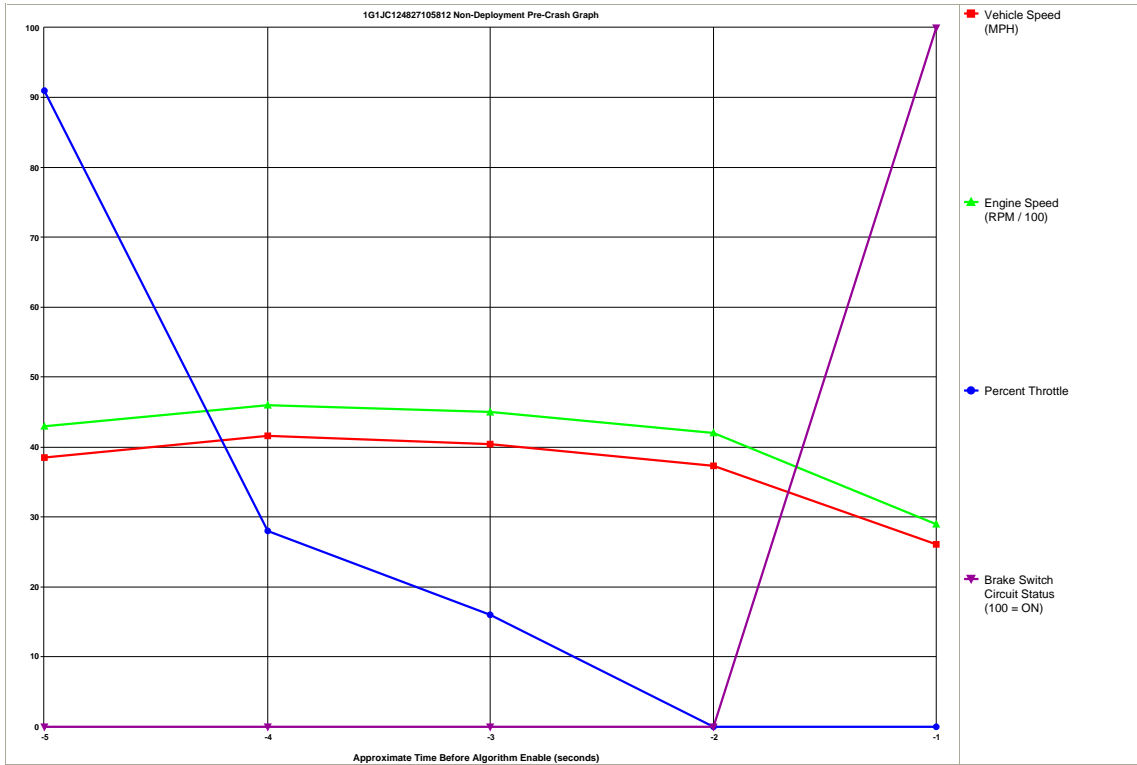

| Seconds Before AE | Vehicle Speed (MPH) | Engine Speed (RPM) | Percent Throttle | Brake Switch Circuit Status |
|-------------------|---------------------|--------------------|------------------|-----------------------------|
| -5 | 39 | 4288 | 91 | OFF |
| -4 | 42 | 4608 | 28 | OFF |
| -3 | 40 | 4480 | 16 | OFF |
| -2 | 37 | 4160 | 0 | OFF |
| -1 | 26 | 2944 | 0 | ON |

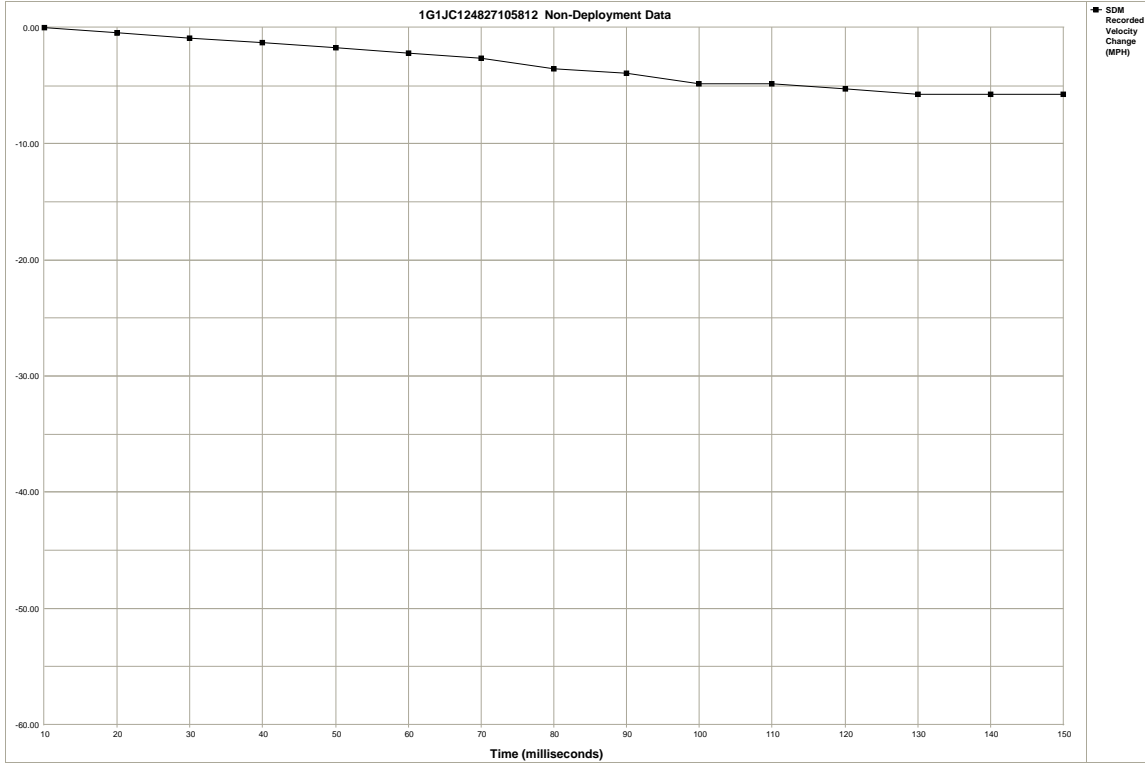

| Time (milliseconds) | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 |
|------------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SDM Recorded Velocity Change | 0.00 | -0.44 | -0.88 | -1.32 | -1.76 | -2.19 | -2.63 | -3.51 | -3.95 | -4.83 | -4.83 | -5.27 | -5.70 | -5.70 | -5.70 |

Hexadecimal Data

This page displays all the data retrieved from the air bag module.
It contains data that is not converted by this program.

```
$01 08 23 00 00
$02 95 6B
$03 41 53 31 31 35 39
$04 4B 34 42 5A 32 31
$05 00
$06 22 67 40 98
$10 F9 44 80
$11 94 96 96 FF 9D 01
$14 03 84 AB 80
$18 84 83 85 BD FF 00
$1C FA 32 4A FA FA FA
$1D FA FA 32 4A FA FA
$1E FA FA
$1F FF 02 00 00 00
$20 A0 00 00 FF 2B FF
$21 FF FF FF FF FF FF
$22 FF FF FF FF FF FF
$23 FF 00 01 D0 01 00
$24 01 02 03 04 05 06
$25 08 09 0B 0B 0C 0D
$26 0D 0D 00 2A 3C 41
$27 43 3E 00 80 00 00
$28 00 2A 47 E9 00 2E
$29 41 46 48 43 00 F9
$2A 44 F0 FF FF FF FF
$2B FF FF FF 00 00 00
$2C 00 00 00 00
$2D 48 35 27 00
$30 A0 00 00 FF 2B FC
$31 FF BF FF FF FF FF
$32 FF FF FF FF FF FF
$33 7C 17 03 01 00 01
$34 02 06 09 0C 0F 10
$35 11 11 11 11 11 11
$36 FF 0E 31 02 38 44
$37 49 49 41 39 00 80
$38 00 00 00 84 9F AD
$39 00 49 4F 4E 46 3D
$3A 00 F9 44 C0 00 00
$3B 00 20 00
$3C 0F 27 3B 21
$40 FF FF FF FF FF FF
$41 FF FF FF FF FF FF
$42 FF FF FF FF FF FF
$43 FF
```

Comments

Connect to SDM - Impact #3